



P. C. B Layout
(Printed-sided view)

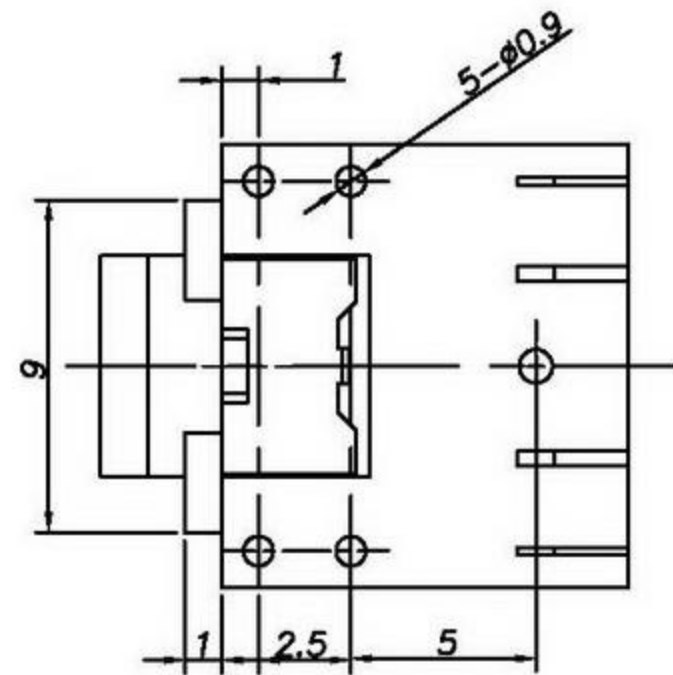

0.5-5M M=± 0.2
 5-30M M=± 0.4
 30-120M M=± 0.6
 120-315M M=± 1.0
 315-10000M M=± 1.6

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: ≤ 50mΩ;
3. Insulation resistance: ≥ 100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

⑦	Bushing	1	Brass	Nickel(Ni)-Plating
⑥	Tip spring	1	Stainless Steel	Tin(Sn)-Plating
⑤	Shunt terminal	1	Brass	Tin(Sn)-Plating
④	Shunt terminal	1	Brass	Tin(Sn)-Plating
③	Ring spring	1	Stainless Steel	Tin(Sn)-Plating
②	Earth terminal	1	Brass	Tin(Sn)-Plating
①	Housing	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

品名 ARTICLE	5P STEREO JACK FOR P.C.B BOARD	
規格 SPECIFICATION		
單位 UNIT	mm	
比例 SCALE		2:1



AVVICON ELECTRONIC CORPORATION

一 障 實 業 有 限 公 司

TEL:886-6-2677751 FAX:886-6-2696498

e-mail: yiwai751@ms9.hinet.net <http://www.avvicon.com>
<http://www.a-adcon.com>

圖號
DRAWING NO.

MJ-495-A

日期
DATE

2009/03/25

繪圖
DRAWN BY

VICKY