



# ShenZhen Topmay Electronic Co., Ltd

## 深圳市亿普电子有限公司

Rm 3306, International Science and Technology Bldg, Central ShenNan Rd3007, FuTian, Shenzhen City, CN.  
深圳市深南中路国际科技大厦 3306 室 TEL: 0755-33341571/2, 33340231, 83279523; FAX: 0755-33341573

### Ceramic Trimmer Capacitors

#### Features

1. Small and thin size.
2. New shape of cover can improve the flux invasion compared with current products.
3. Improvement of the adhesion between rotor and stator leads to superior stability.
4. Unique construction with no plastic material provides superior soldering heat resistance to maintain excellent characteristic performance after reflow soldering.
5. Suitable for high frequency circuit due to high self-resonant frequency.





#### Application

Crystal oscillators, Crystal filters, pagers, cordless telephones, PHS, hand radios, cellular telephones, remote keyless entry systems, W-LAN, etc.



#### Specifications:

##### Outline drawing

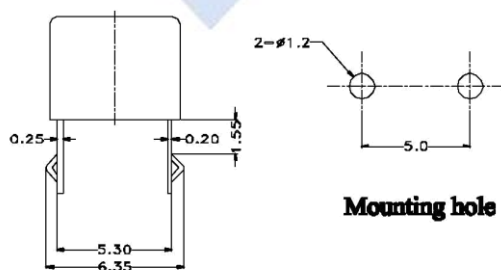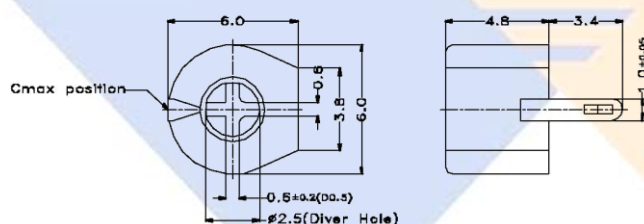

Mounting hole

## Outline drawing

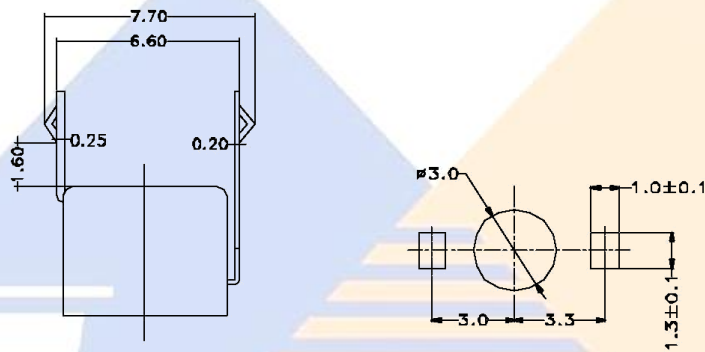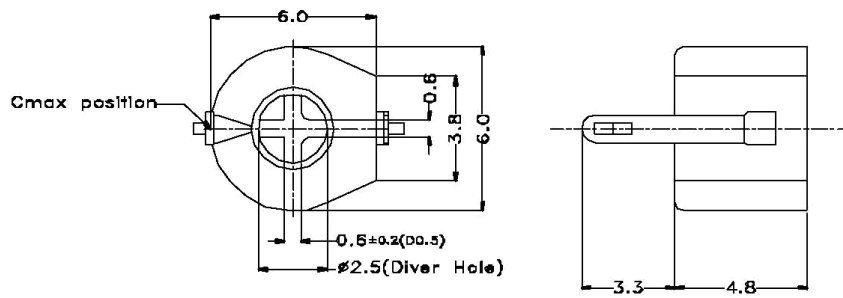

## Mounting hole

Capacitance(pF)		Temperature coefficient(ppm/°C)	Q factor (1MHz, Cmax)	Marking color
Min	Max			
1.3	3.0 <sup>+50</sup> <sub>-0</sub> %	NP 0±250	>500	Black
2.0	5.0 <sup>+50</sup> <sub>-0</sub> %	NP 0±250	>500	Blue
3.0	10.0 <sup>+50</sup> <sub>-0</sub> %	N 450±300	>500	White
5.0	20.0 <sup>+50</sup> <sub>-0</sub> %	N 750±300	>500	Red
6.5	30.0 <sup>+50</sup> <sub>-0</sub> %	N 1000±500	>500	Green
7.0	40.0 <sup>+50</sup> <sub>-0</sub> %	N1200±500	>500	Yellow
10.0	50.0 <sup>+50</sup> <sub>-0</sub> %	N 2200±800	>300	Brown
12.0	60.0 <sup>+50</sup> <sub>-0</sub> %	N 2200±800	>200	Brown
18.0	90.0 <sup>+50</sup> <sub>-0</sub> %	N 2200±800	>200	Brown
26.0	120.0 <sup>+50</sup> <sub>-0</sub> %	N 2200±800	>200	Brown

### 3. Characteristics

#### Standard atmospherics conditions:

Unless otherwise specified, the standard range of atmospherics conditions for making measurements and tests are as follows:

Ambient temperature : 5°C to 35°C ;  
Relative humidity : 45% to 85% ;  
Air pressure : 86kPa to 106kPa.

If there is any doubt about the results, measurement shall be made within the following limits:

Ambient temperature : 20°C ± 2°C ;  
Relative humidity : 60% to 70% ;  
Air pressure : 86kPa to 106kPa.

#### Operating temperature range:

The operating temperature range is the range of ambient temperature of which the trimmer capacitor can be operated continuously within rated voltage.

-25°C to +85°C

#### Storage temperature range:

The Storage temperature range is the range of ambient temperature at which the trimmer capacitor can be stored without damage, conditions are as specified elsewhere in these specifications.

-25°C to +85°C

#### 3-1 Mechanical characteristics:

	Items	Conditions	Specification
1	Rotational torque	When the spindle is rotated at a rate of 10 rpm	2.0~20.0Nm (20~200gf.cm)
2	Difference between the maximum and minimum value of rotational torque	Difference between the maximum value and the minimum value when the shaft is rotated at a rate of 10 rpm	3 : 1 or less
3	Terminal strength	A static load of 5N (510gf) shall be applied to the terminal for 10 sec. Terminals shall be inclined through an angle of 45° in the vertical plane and then returned to its initial position. This cycle shall be made for twice	Without excessive looseness of terminals
4	Shaft load	A load of 1 N shall be applied perpendicular to the shaft for 10s.	Clauses 3-1-1 and 3-1-2 should be satisfied

#### 3-2 Electrical characteristics:

	Items	Conditions	Specification
1	Rated voltage		100 V d.c.
2	Nominal capacitance	Maximum capacitance(Measured at 1MHz)	Table 1 shall be satisfied.
		Minimum capacitance(Measured at 1MHz)	Table 1 shall be satisfied.

	Items	Conditions	Specifications														
3	Q	Measured at 1MHz, Cmax	Table 1 shall be satisfied.														
4	Insulation resistance	A voltage of 100 V d.c. shall be applied for 1 min, after which measurement shall be made	10000 MΩ or more														
5	Dielectric strength	100 V d.c. for 1 min	Without damage														
6	Capacitance drift after adjustment	Rotation shall be made for 1 cycles for 180 degree at a rate of 20 rpm.  Difference between the capacitance value immediately after the shaft is stopped at the position of the maximum capacitance value and the value after 1.5min later.(measured at 1 MHZ)	±1% within														
7	Temperature characteristics and change in capacitance	<p>Test condition :</p> <p>Capacitance shall be 80% to 90% of the maximum value.</p> <table><tr><th>Step</th><th>Temperature</th><th>Duration</th></tr><tr><td>1</td><td>20°C ±2°C</td><td rowspan="5">60min</td></tr><tr><td>2</td><td>-25°C ±3°C</td></tr><tr><td>3</td><td>20°C ±2°C</td></tr><tr><td>4</td><td>85°C ±2°C</td></tr><tr><td>5</td><td>20°C ±2°C</td></tr></table> <p><b>Temperature coefficient</b> <math display="block">=(C2-C1)/C1(T2-T1) \times 10^6 (\text{ppm}/^{\circ}\text{C})</math> however: C1= capacitance at step3 C2= capacitance at step2/or step4 T1= measuring temperature at step3 T2= measuring temperature at step2/or step4</p>	Step	Temperature	Duration	1	20°C ±2°C	60min	2	-25°C ±3°C	3	20°C ±2°C	4	85°C ±2°C	5	20°C ±2°C	Table 1 shall be satisfied
Step	Temperature	Duration															
1	20°C ±2°C	60min															
2	-25°C ±3°C																
3	20°C ±2°C																
4	85°C ±2°C																
5	20°C ±2°C																
		<p><b>Change in capacitance</b> For difference of maximum capacitance at steps 1,3 or 5, refer to the value at step 3</p>	5% within														

### 3-3 Endurance characteristics:

Test capacity shall be 80% to 90% of the maximum value excluding clauses 3-3-1, 3-3-3 and 3-3-10.

	Items	Conditions	Specification
1	Solder ability	Bit temperature : $390 \pm 10^{\circ}\text{C}$  Application time of solder iron : 3sec or less	(1) Solder wetting time shall be 3 s or less.  (2) A new uniform coating of solder shall cover a minimum of 95% of the surface being immersed.
2	Resistance to soldering heat	<u>Solder bath method</u> Solder temperature : $260 \pm 5^{\circ}\text{C}$ Immersion time : $7 \pm 0.5\text{sec}$ Immersion dept : up to the surface of the board. <u>Solder iron method</u> Bit temperature : $390 \pm 10^{\circ}\text{C}$ Application time of solder iron : $3 \pm 0.5\text{sec}$	Table 2 shall be satisfied.
3	Resistance to flux penetration	The printed wiring board shall be fully immersed in the flux for 3 to 5 s and then taken out of the flux . the capacitor shall be inserted completely into the board as soon as the board is removed from the flux . either the flux bath method or the foaming method shall be used to apply flux to the board . in either case , flux should not come into contact with the component side surface and fluxing time shall be 3 to 4 s.  Note :after fluxing , if preheating is necessary before mounting ,then the surface of the solder side shall be heated to $75^{\circ}\text{C}$ to $90^{\circ}\text{C}$ for 1 min or less. Using an automatic soldering system or a hand dipping system. The board shall be soldered up the component side surface (but the solder shall not come into contact with the component side )for $5 \pm 1$ s at $250^{\circ}\text{C}$ to $260^{\circ}\text{C}$ ,the board shall be subjected to standard atmospheric conditions for 24 h or more after the soldering .tests shall then be carried out as specified below. ① visual inspection of appearance . ② measurement of characteristics as specified.	Electrical characteristics and mechanical characteristics shall be satisfied.
4	Vibration	At maximum capacitance , only endurance conditioning by a frequency shall be made .the entire frequency range , from 10Hz to 50Hz and return to 10Hz , shall be transverse in 1 min.  Amplitude (total excursion) : 1.5 mm  This motion shall be applied for a period of 2 h in each of mutually perpendicular axis (a total of 6 h)  The variable capacitance shall be subjected to standard atmospheric for other procedures.	Table 2 shall be satisfied.
5	Shock	At maximum capacitance. Peak acceleration : $490 \text{ m/s}^2$ (50G) Duration of pulse : 11 ms Three successive shall be applied in both directions of mutually perpendicular axis (a total of 18 shock).	Table 2 shall be satisfied.



	Items	Conditions	Specification															
6	Cold	Placed in tank at $-25\pm 2^{\circ}\text{C}$ for $48\pm 4$ hours, left at room temperature for 1 hour after which measurement shall be made.	Table 2 shall be satisfied.															
7	Dry heat	Placed in tank at $85\pm 2^{\circ}\text{C}$ for $48\pm 4$ hours, left at room temperature for 1 hour after which measurement shall be made.	Table 2 shall be satisfied.															
8	Damp heat	Placed in tank at $40\pm 2^{\circ}\text{C}$ , 90% to 95%RH for $96\pm 4$ hours, left at room temperature for 1 hour after which measurement shall be made.	Table 2 shall be satisfied.															
9	Change of temperature	<div><p>The capacitor shall be subject to 5 continuous cycles, such as shown in table below . And then it shall be subjected to the controlled recovery conditions for 1 hour, after which measurement shall be made.</p><table><tr><th>Step</th><th>Temperature</th><th>Duration(min)</th></tr><tr><td>1</td><td><math>-25^{\circ}\text{C}\pm 3^{\circ}\text{C}</math></td><td>30</td></tr><tr><td>2</td><td><math>20^{\circ}\text{C}\pm 2^{\circ}\text{C}</math></td><td>10~15</td></tr><tr><td>3</td><td><math>85^{\circ}\text{C}\pm 2^{\circ}\text{C}</math></td><td>30</td></tr><tr><td>4</td><td><math>20^{\circ}\text{C}\pm 2^{\circ}\text{C}</math></td><td>10~15</td></tr></table></div>	Step	Temperature	Duration(min)	1	$-25^{\circ}\text{C}\pm 3^{\circ}\text{C}$	30	2	$20^{\circ}\text{C}\pm 2^{\circ}\text{C}$	10~15	3	$85^{\circ}\text{C}\pm 2^{\circ}\text{C}$	30	4	$20^{\circ}\text{C}\pm 2^{\circ}\text{C}$	10~15	Table 2 shall be satisfied.
Step	Temperature	Duration(min)																
1	$-25^{\circ}\text{C}\pm 3^{\circ}\text{C}$	30																
2	$20^{\circ}\text{C}\pm 2^{\circ}\text{C}$	10~15																
3	$85^{\circ}\text{C}\pm 2^{\circ}\text{C}$	30																
4	$20^{\circ}\text{C}\pm 2^{\circ}\text{C}$	10~15																
10	Operating endurance	The capacitor shall be subject to 10 cycles(5 cycles for each left and right) at a speed of 10 rpm to 15rpm.	Table 2 shall be satisfied.															

Table 2

	Items	Conditions	Specification
1	Appearance		There shall be no deformation, excessive looseness, or damage
2	Rotational torque	Refer to clauses 3-1-1 and 3-1-2	Clauses 3-1-1 and 3-1-2 should be satisfied
3	Change in capacitance	Refer to clauses 3-2-2	Relative to previously ( $\pm 5\%$ ) within specified value
4	Q	Refer to clauses 3-2-3	Clauses 3-2-3 should be satisfied
5	Insulation resistance	Refer to clauses 3-2-4	Clauses 3-2-4 should be satisfied
6	Dielectric strength	Refer to clauses 3-2-5	Clauses 3-2-5 should be satisfied

※ Change in capacitance  $= (C2 - C1) / C1 \times 100(\%)$

C1=value measured before test

C2=value measured after test