

FEATURES


2 units serially connected to provide 5.4V products

Lead terminal type


2-Pin terminal type according to customer's requirement

Drawing


I TYPE

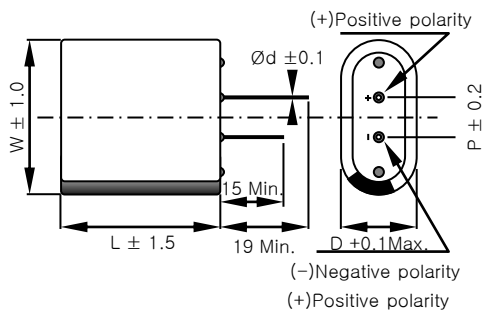

O TYPE

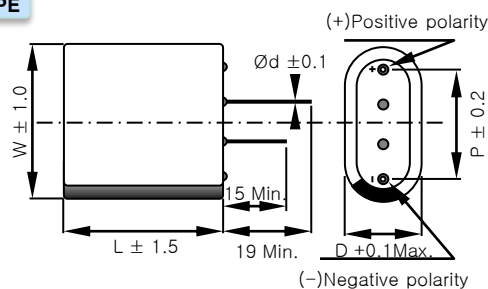

H TYPE

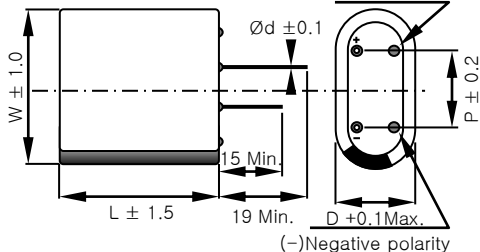

$D = 10.5 \text{ mm}$

TYPE	I	O	H
P	5.5	15.5	10.5

SPECIFICATION

ITEM		CHARACTERISTICS
Rated Voltage (V_R)		5.4 V
Operating Temperature		-40 ~ +65 °C
Capacitance Tolerance		-10 ~ +30%
High Temp. Load Life	Measure	After 1,000 hours at V_R loaded under +65 °C, capacitors meet the following criteria.
	Cap. Change	$\leq 30\%$ of initial value
	ESR Change	100% increase from specified value
Cycle Life Characteristics	Cycle	100,000
	Cap. Change	$\leq 30\%$ of initial value
	ESR Change	100% increase from specified value
	Condition	Cycle of Charge/discharge from V_R to $1/2V_R$
Shelf Life		2 years No Electrical Charge, Temperature Below 70 °C ($\Delta C : \leq 10\%$ of initial value / $\Delta \text{ESR} : \leq 50\%$ of initial value)

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)	Size (mm) D × W × L	Weight (g)	Volume (ml)
			AC(1kHz)	DC					
VEC5R4355QG	5.4	3.5	115	195	5.5	0.014	10.5×21×22.5	4.8	5.0

* Max. Current : 1 sec. discharge to $1/2V_R$

* When do module more than 2 series, please fully discharge over 1 hour first, then assemble right after within 1 hour.