




1

2

3

4

5

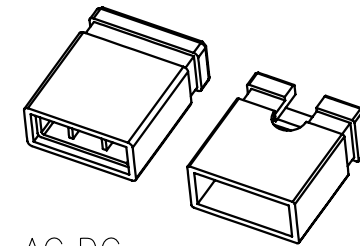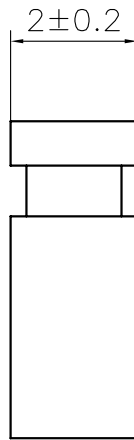
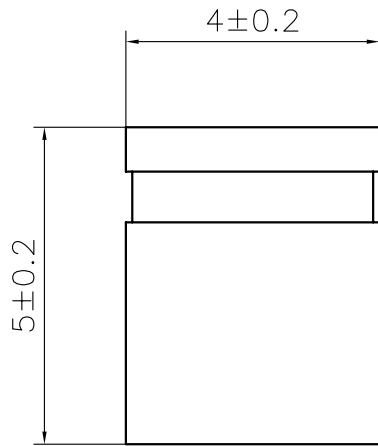


Specifications:

Current Rating:2.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1000M ohm Min
 Withstanding Voltage:500V AC/minute
 Operating Temperature Range:-40°C~+105°C
 Material:
 Insulator Material:PBT UL94V-0
 Contact Material:Phosphor Bronze
 Finish:Gold Plated

2205BG-XX
 (Close Type)

2205BG=5.0MM Length Close Type(Black)

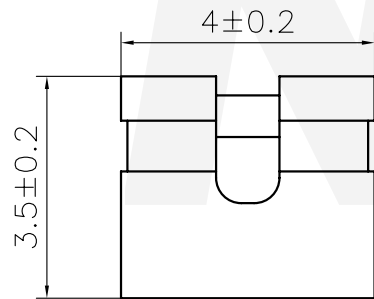

How To Order



2205XG-XX

Insulator Color
 Standard Black Color
 BU: Blue ; RD: Red
 YL: Yellow ; WH: White
 GN: Green
 G: Gold Plated
 B: Close Type
 C: Open Type

2205CG-XX
 (Open Type)

2205CG=3.5MM Length Open Type(Black)

RoHS Compliant

				DRAWN: Allen	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 2.0mm Mini Jumper	SIZE A4
E				CHECKED: Jerry Chen	UNIT: mm			
D				APPROVAL: Mike Wu	SCALE:	PART NO: 2205XG-XX		
C					SHEET: 1 / 1			
B				PROJECTION: 				
A	25-SEP-2008	(P0009)	Allen					
REV	DATE	FILE	BY					