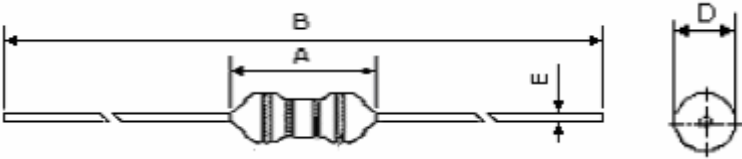



# SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :	
PART NO : AL0510-393K				DWG.NO : IT2261011	
CUSTOMER PART NO :				CUST.DWG.NO :	
(1) DIMENSION (UNIT: mm)  				A	14.0 (MAX) m/m
				B	62.0 ± 6.00 m/m
				D	5.0 (MAX) m/m
				E	0.6 ± 0.05 m/m
				F	m/m
				G	m/m
				H	m/m
				I	m/m
				J	m/m
				K	m/m
				(2) ELECTRICAL REQUIREMENTS	
L (mH)	39 ± 10%	TEST FREQ	1KHz/0.25V		
Q	30 (MIN)	TEST FREQ	79.6KHz		
RDC (Ω)	270 (MAX)	TEST FREQ			
IDC (mA)	35 (MAX)	TEST FREQ			
TEST INSTRUMENTS					
LCR 101					
CORE	JS6W DR 4×6			APPROVED BY 吳載敏	
WIRE	2UEW φ 0.03mm			CHECKED BY 張明德	
WINDING	1590TS(REF)			DRAWN BY AMY	

**CORE MASTER ENTERPRISE CO., LTD.**

TEL: 886-2-8919-1288    FAX: 886-2-8919-1298    WEB: [www.coremaster.com.tw](http://www.coremaster.com.tw)