


DIM	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

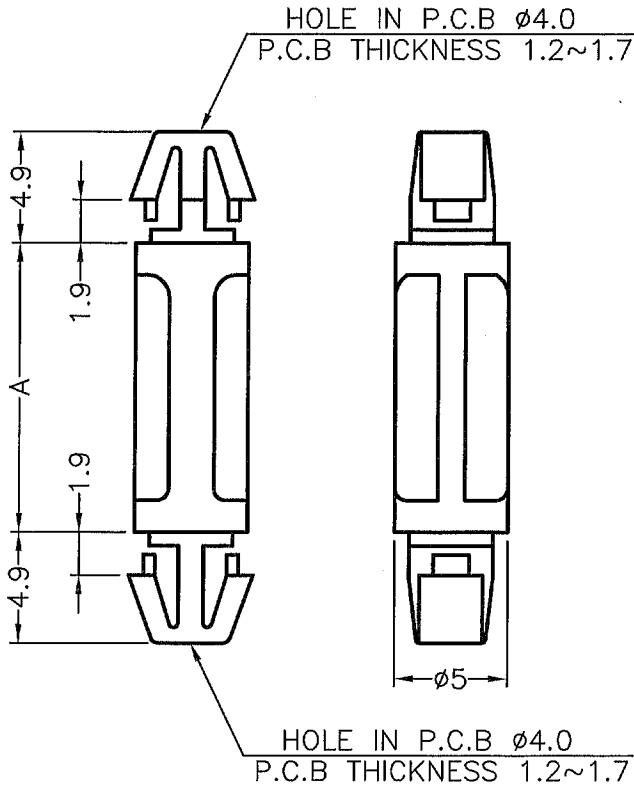

PART NO.	A
LCC-3S	3.0
LCC-3	3.5
LCC-4	4.0
LCC-5	5.0
LCC-6S	6.0
LCC-6	6.4
LCC-7	7.0
LCC-8	8.0
LCC-9.5	9.5
LCC-10S	10.0
LCC-10	10.5
LCC-11.5	11.5
LCC-12S	12.0
LCC-12	12.7
LCC-14	14.0
LCC-15	15.9
LCC-18	18.0
LCC-19	19.0
LCC-20	20.0
LCC-25	25.0
LCC-25.4	25.4
LCC-27	27.0
LCC-30	30.0
LCC-34	34.0
LCC-40	40.0
LCC-55	55.0
LCC-69	69.0
LCC-71	71.2
LCC-72	72.0
LCC-74	74.2
LCC-80	80.0

Component - Plastics

E41938

E I DUPONT DE NEMOURS & CO INC  
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19880

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)  
Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comperative Tracking Index (CTI): 0  
Dielectric Strength (kV/mm): 13  
High-Voltage Arc Tracking Rate (HVTAR): 0  
Dimensional Stability (%): -  
Inclined Plane Tracking (IPT): -  
Volume Resistivity (10<sup>4</sup> ohm-cm): 14  
High Volt, Low Current Arc Resals (D495): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE: (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Milinor or "DEL" for Delrin or "CRA" for Crastin or "RYN" for Rynite or "ETPV" for ETFV grades.

r9 - Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTIs for all properties and Regrind exceeding 25% is limited to V-2 Flammability for WT, RD, BK.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1995-07-29  
Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.



康揚企業股份有限公司  
KANG YANG HARDWARE ENTERPRISE CO., LTD.  
康揚塑膠(東莞)有限公司  
KANG YANG PLASTIC(DONG GUAN) CO., LTD.  
康哲電腦配件(吳江)有限公司  
KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE	SPACER SUPPORT	SPEC. DWG.
MATERIAL	NYLON 66 UL94V-2	DATE
FINISH		1997.11.18
COLOR	NATURAL	DRAWN
		JASON
PART NUMBER	DRAWING NUMBER	CHECK
SEE ABOVE	LCC-H	
SIZE	SCALE	UNIT
A4	NONE	mm
REV	E	APPROVED
		Kang
UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	