



OptoSupply

Light It Up


3mm Round Pure White LED

OSW4YK3Z72A

■ Features

- High Luminous LEDs
- 3mm Round Standard Directivity
- UV Resistant Epoxy
- White Diffused Type

■ Outline Dimension

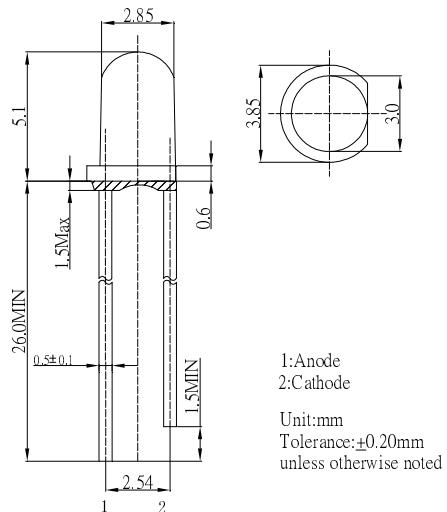

■ Applications

- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■ Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Current	I _F	30	mA
Pulse Forward Current#	I _{FP}	100	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	108	mW
Operating Temperature	T _{opr}	-30 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T _{sol}	260°C/5sec	-

#Pulse width Max 10ms , Duty ratio max 1/10

■ Electrical -Optical Characteristics (Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage*1	V _F	I _F =20mA	2.8	3.1	3.6	V
DC Reverse Current	I _R	V _R =5V	-	-	10	μA
Luminous Intensity*2	I _v	I _F =20mA	1120	1560	-	mcd
Color Temperature*3	CCT	I _F =20mA	5500	6500	8500	K
Chromaticity	x	I _F =20mA	-	0.31	-	
Coordinates*4	y	I _F =20mA	-	0.33	-	
50% Power Angle	2θ _{1/2}	I _F =20mA	-	70	-	deg


*1 Tolerance of measurements of forward voltage is $\pm 0.1\text{V}$

*2 Tolerance of measurements of luminous intensity is $\pm 15\%$

*3 Tolerance of measurements of color temperature is $\pm 10\%$

*4 Tolerance of measurements of chromaticity coordinates is $\pm 10\%$

■ Directivity

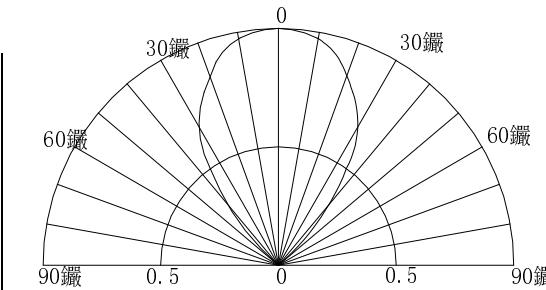

LED & Application Technologies



REACH
The new EU chemicals legislation





OptoSupply







Light It Up

3mm Round Pure White LED

OSW4YK3Z72A

InGaN LED

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

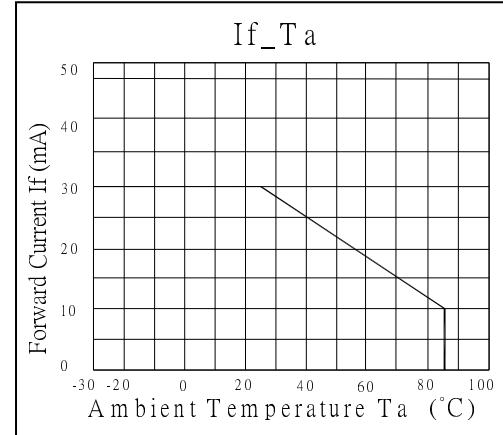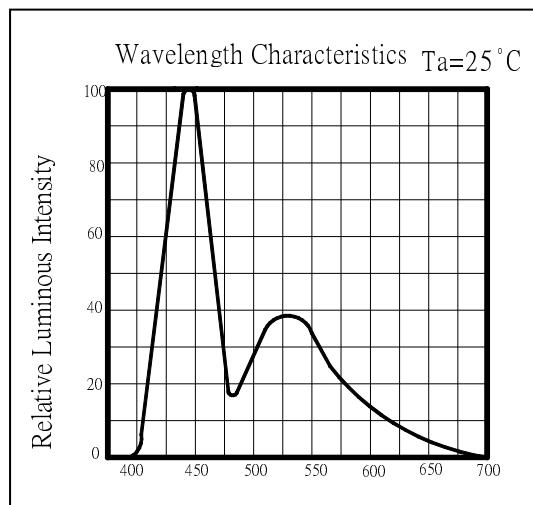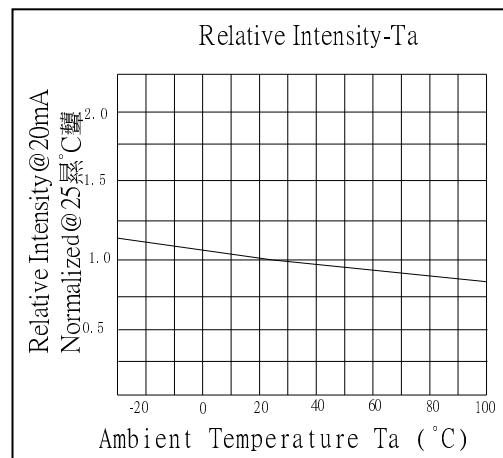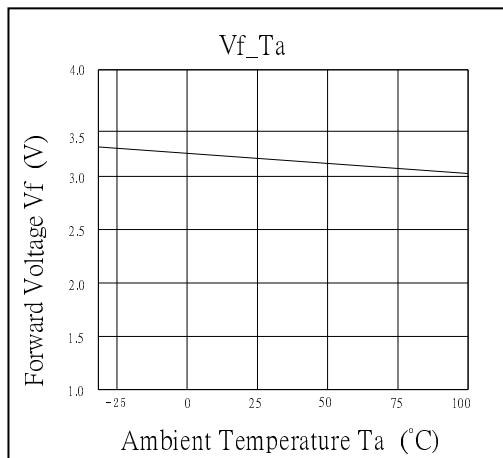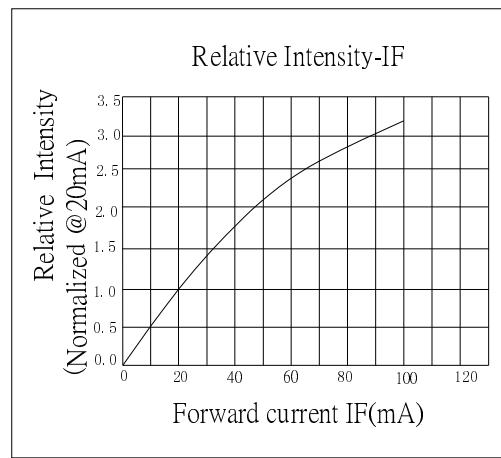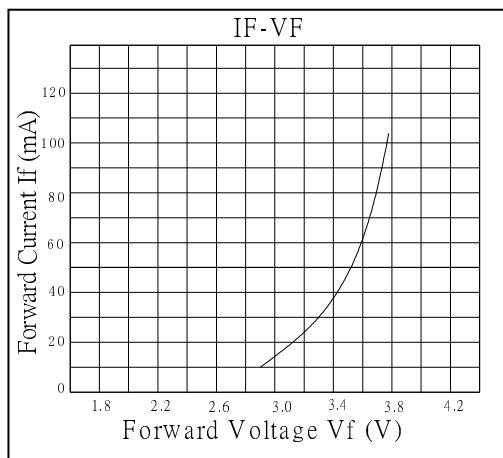

LED & Application Technologies



REACH
The new EU chemicals legislation

