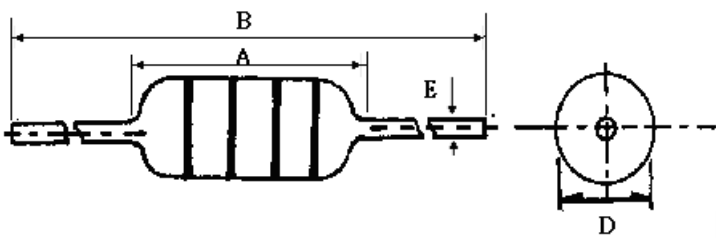



SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :			
PART NO : AL0510-152K				DWG.NO : IT2217483			
CUSTOMER PART NO :				CUST.DWG.NO :			
(1) DIMENSION (UNIT:mm) 				A	14.0 (MAX)	m/m	
				B	62.0 ± 6.00	m/m	
				D	5.0 (MAX)	m/m	
				E	0.6 ± 0.05	m/m	
				F		m/m	
				G		m/m	
				H		m/m	
				I		m/m	
				J		m/m	
				K		m/m	
				(2) ELECTRICAL REQUIREMENTS			
L (mH)	1.5 ± 10%	TEST FREQ	1KHz/0.25V				
Q	30 (MIN)	TEST FREQ					
RDC (Ω)	12 (MAX)	TEST FREQ					
IDC (mA)	300 (MAX)	TEST FREQ					
TEST INSTRUMENTS							
LCR METER CHEN HWA 100							
CORE	DRWW 4×6	APPROVED BY		吳載敏			
WIRE	2UEW φ 0.09mm	CHECKED BY		張明德			
WINDING	305 Ts	DRAWN BY		APPLE			

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO : AL0510-152K				DWG.NO : IT2217483					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	L (mH)	RDC (Ω)	IDC (mA)						
FREQ	1KHZ 0.25V								
SPEC	1.5 ± 10%	12 (MAX)	300 (MAX)						
1	1.47	7.82	OK						
2	1.46	7.80	OK						
3	1.49	7.70	OK						
4	1.45	7.85	OK						
5	1.51	7.95	OK						
6	1.50	7.98	OK						
7	1.50	7.79	OK						
8	1.48	8.05	OK						
9	1.52	7.82	OK						
10	1.50	7.86	OK						
X	1.49	7.86							
R	0.07	0.35							
							APPROVED BY		
							吳載敏		
							CHECKED BY		
							張明德		
							DRAWN BY		
							APPLE		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw