
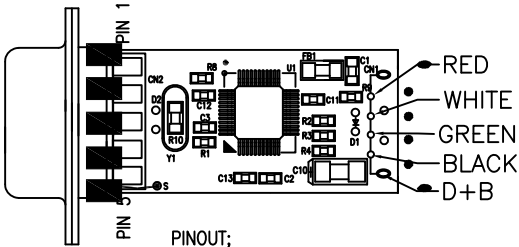
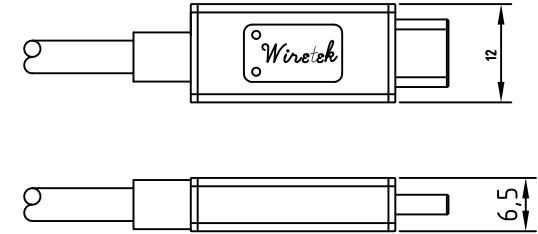

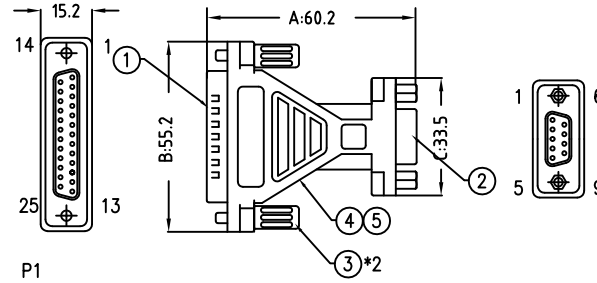
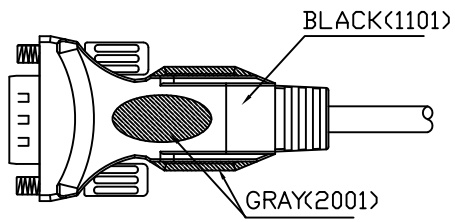


WEIGHT	CUSTOMER NO:	REMARK
118.3g-K3	VE939	WIRETEK

A:1800±20

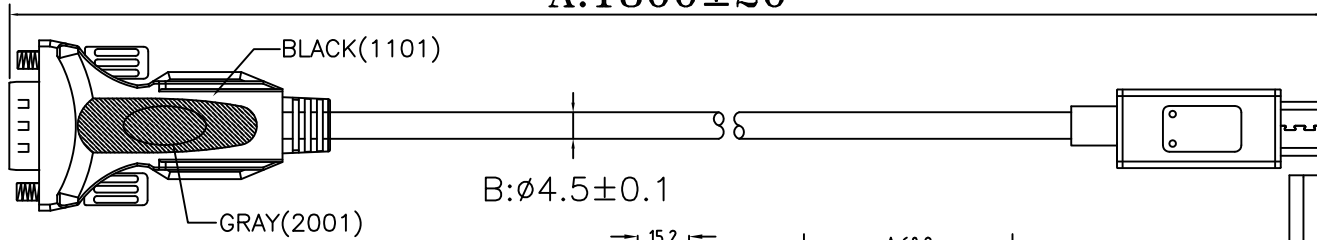

PINOUT;

P1		P2
1	RED	A4
2	WHITE	A7
3	GREEN	A6
4	BLACK	A12
SHELL	DRAIN	

PINOUT DIAGRAM:

P1	P2
DB25M	DB9F
8	1
3	2
2	3
20	4
7	5
6	6
4	7
5	8
22	9
SHELL	SHELL

TYPE C	雙倍線測試接點	TYPE C
1+12+13+24		1+12+13+24
6		6
7		7
4+9+16+21		4+9+16+21
設定電阻測試 5	5.1KΩ	12
設定電阻測試 12	5.1KΩ	5

PINOUT:

P1	RED	P2
OPEN		A4
OPEN	WHITE	A7
OPEN	GREEN	A6
OPEN	BLACK	A12
OPEN	DRAIN	

NOTE:

- 1)包裝: 方形真空罩+內托+背卡, 內附1PCS光碟
- 2)DM9/M成型外模為黑色(1101), 內模為灰色(2001), 線材與轉接頭均為黑色(1101).
- 3)真空罩需打超音波
- 4)產品符合RoHS標.

B	光盤更改為32030145	Chen. H	2018/11/2
A	FIRST EDITION	FPZ	2013/06/19
REV. ECR	DESCRIPTION	C.N.	DATE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.		WIRETEK INTERNATIONAL INVESTMENT LTD.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		TITLE TYPE C(USB2.0) TO RS232 CABLE	
DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm	DR.	APPD.
80.01 TO 150.00mm	±0.15mm	Chen.H	
150.01mm	±0.20mm	PART NO:	VE939
MATERIAL	MATERIAL	SCALE	SHEET 1 / 2 UNIT MM SIZE A4 REV. B
FINISH	FINISH		