



Golden Power Corporation (HK) Ltd.

型号 Model No. : MR2000AA


Description: Ni-MH 2000mAh AA size Rechargeable battery

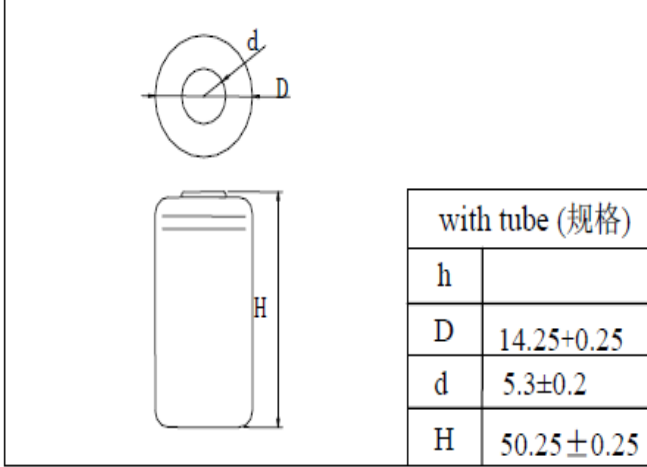


Nominal Capacity 额定容量		2000 mAh	
Nominal Voltage 额定电压		1.2V	
Charge current 充电电流	Standard 标准	200mA	
	Quick 快充	1000mA	
Charge time 充电时间	Standard 标准	16 Hrs	
	Quick 快充	2.4 Hrs	
Ambient Temperature 使用温度	Charge 充电	Standard 标准	0°C~45°C
		Quick 快充	0°C~40°C
	Discharge 放电		-20°C~50°C
	Storage 储存		-20°C~30°C
Internal Impedance(mΩ) (Upon fully charge) 充满电后内阻		≤35	
Weight 重量		28g	

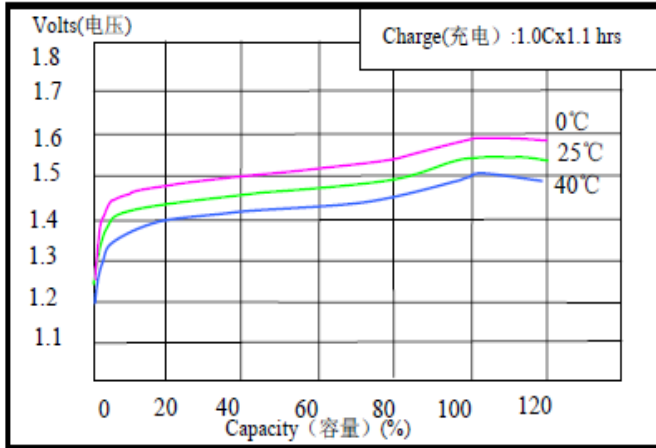


(1.0C Rate Charging Curves) 1.0C 充电曲线图

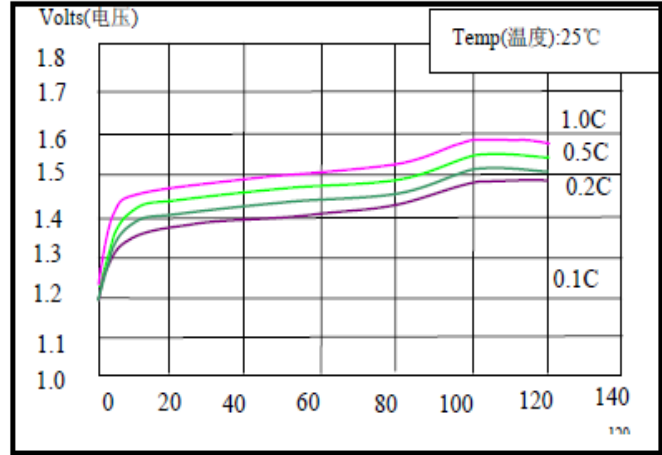

(1.0C Rate Charging Curves) 1.0C 充电曲线图

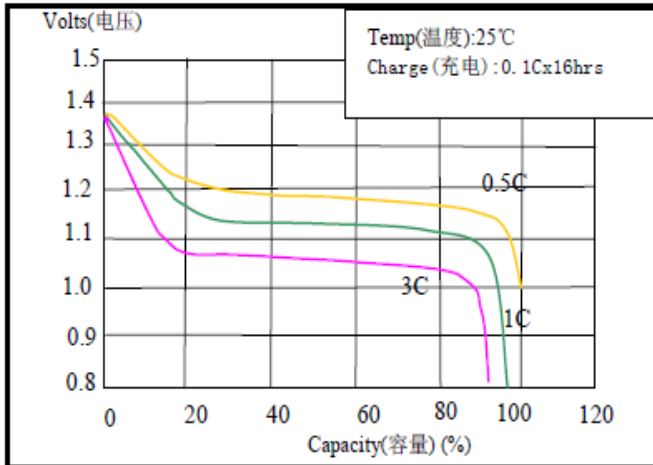

0.5C/1C/3C Rate Discharging Curves (放电曲线图)

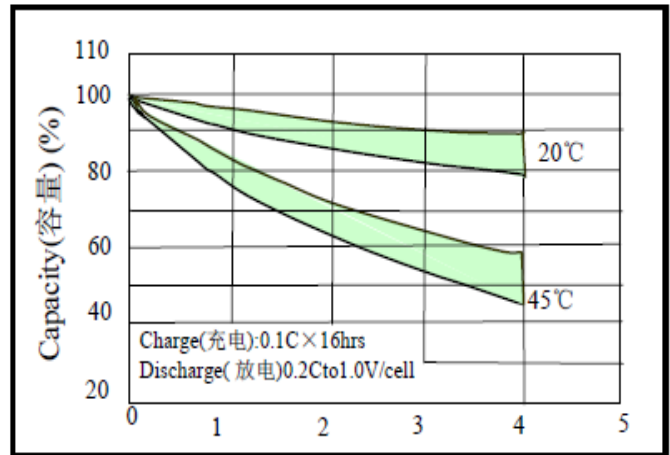

Storage & self discharge Curves
不同温度荷电保持曲线图

Weeks (周)

2. EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage nor deformation.

3. CAUTION

- (1) Reverse charging is not acceptable.
- (2) Charge before use. The cells/batteries are delivered in an uncharged state.
- (3) Do not charge/discharge with more than our specified current.
- (4) Do not short circuit the cell/battery Permanent damage to the cell/battery may result.
- (5) Do not incinerate or mutilate the cell/battery.
- (6) Do not solder directly to the cell/battery.
- (7) the life expectancy may be reduced if the cell/battery is subjected adverse conditions like: extreme temperature, deep cycling, excessive overcharge/ over-discharge.
- (8) store the cell/battery uncharged in a cool dry place. Always discharge batteries before bulk storage or shipment.